

Open articulated arm awning 530


Information at a glance



Der SonnenLichtManager



Articulated arm awning 530

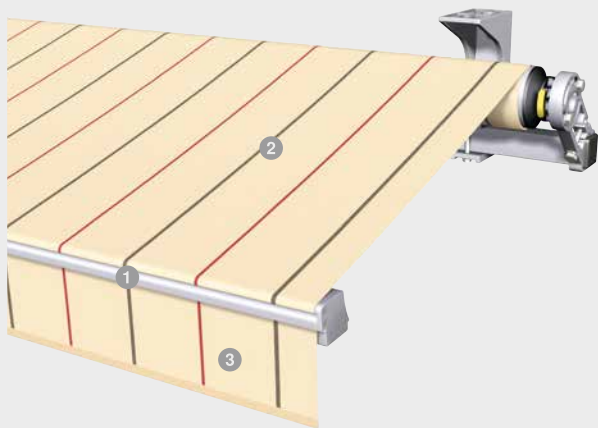

- 1 Projection profile
- 2 Fabric
- 3 Valance



► The benefits for you

- Universally usable
- Protection against low sun by setting the inclination angle to up to 90°
- Large selection of design options
- LB model available for large projection with small awning width

► Features

- Construction limit values:
 - max. width: 6,000 mm
 - max. projection: 3,000 mm
- max. inclination angle: 90°
- Articulated arm: power transmission through textile tape
- Drive: motor, optional: radio motor, solar drive, crank
- Powder-coated in RAL 90016, RAL 9006, optional in accordance with WAREMA Colour World
- Fabric: Standard/Lumera acrylic fabric, optional: All Weather acrylic fabric, Perfora acrylic fabric, Soltis 92 fabric
- Brilliant extras: LED strip light rail, radiant heater, WMS Wind sensor, fabric lettering (screen printing)
- Wall and ceiling installation, rafter installation