

Half-closed articulated arm awning H60


Information at a glance



Der SonnenLichtManager



Articulated arm awning H60

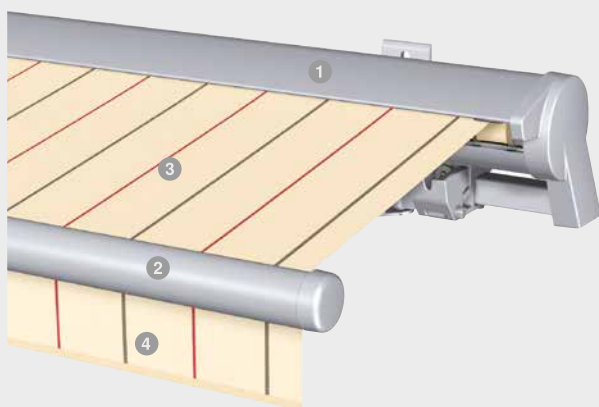

- 1 Rain hood
- 2 Projection profile
- 3 Fabric
- 4 Valance



► The benefits for you

- Protection for fabric and articulated arms through the standard rain hood
- Large selection of design options
- Additional fabric protection from below through optional fabric bearing shell
- LB model available for large projection with small awning width

► Features

- Construction limit values:
 - max. width: 7,000 mm
 - 13,500 mm (coupled unit)
 - max. projection: 4,000 mm
- max. inclination angle: 45°
- Articulated arm: power transmission through chain/cable, optional: segment
- Drive: motor, optional: radio motor, solar drive, crank
- Powder-coated in accordance with WAREMA Colour World
- Fabric: Standard/Lumera acrylic fabric, optional: All Weather acrylic fabric, Perfora acrylic fabric, Soltis 92 fabric
- Brilliant extras: valance roller blind with crank/motor or WMS Comfort control, integrated LED strips, LED strip light rail, radiant heater, WMS Wind sensor, fabric lettering (screen printing)
- Wall and ceiling installation, rafter installation