

Conservatory awning W6

Information at a glance




Der SonnenLichtManager

Photo: Hebel Haus



Conservatory awnings W6

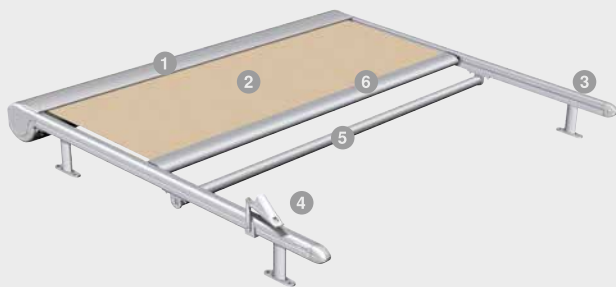

- 1 Cover panel
- 2 Fabric
- 3 Guide
- 4 Sensor system
- 4 Guiding tube
- 6 Projection profile



Photo: Hebel Haus

► The benefits for you

- Optimal fabric tension through pre-tensioned spring mechanism
- Toothed belt with steel insert as reliable pulling element
- Integrated wind and sun sensor (sensor system) optionally available
- Perfectly combinable with the conservatory awning D2

► Features

- Construction limit values:
 - max. width: 4,000 mm
 - 4,500 mm (coupled unit)
 - max. projection: 6,000 mm
 - max. area: 18 m²
- Drive: motor, optional: radio motor
- Powder-coated in accordance with WAREMA Colour World
- Fabric: Standard/Lumera acrylic fabric, optional: All Weather acrylic fabric, Perfora acrylic fabric, Soltis 92 fabric
- Brilliant extras: with integrated sensor system (wind and sun sensor), mutual interlocking with ventilation wing, direction of movement from bottom to top
- External installation
- Installation possible with brackets with different spacings

2018806_en/04.2017